


Pigment Yellow 62

Color Type Monoazo Lake

Color Index No. P.Y. 62

CAS NO. 12286-66-7

Structure:

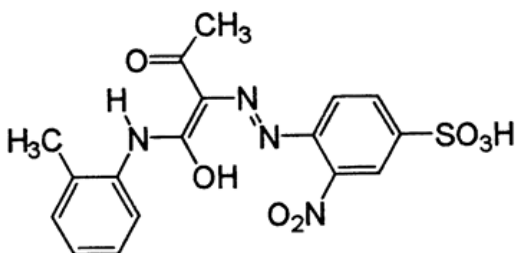

Description:

- Little reddish than Yellow 13 with good plasticizer resistance, light fastness and heat stability.
- Recommend using for HDPE with temperature resistance of 260°C/5 minutes. It also can be used in PO, PVC and polyurethane coloring.

Physical properties and Fastness:

Density (g/cm ³)	1.20-1.78
Oil absorption (ml/100g)	45±5
Water soluble matter (%)	≤2.5
PH Value	6.0-7.5
Heat Resistance (°C)	220-260°C
Light Fastness	6~7
Water Resistance	4
Oil Resistance	5
Acid Resistance	5
Alkali Resistance	5
Alcohol Resistance	5
Migration	4~5

Color Card:



Applications:

Plastic	HDPE	●
	PVC	●
	PO	○
	PU	○

Remark: ● High Recommendation;

○ Recommendation; –Limit Suitability

Storage conditions:

Should be sealed for avoiding light and moisture.

Package:

25kgs craft bag with Carton box on pallet.

Please note: *** This technical index and recommending application information is based on the present knowledge for reference only. Necessary test is needed before you put into use. *******